



The Ergomat Nitril ESD-Conductive is made of pure Nitril rubber and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. The ultimate mat for areas requiring static dissipation.

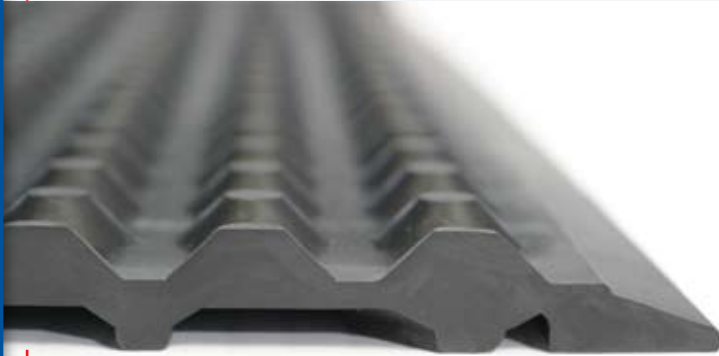

Unmatched Safety Features

- Molded beveled edges
 - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
 - No overlapping or worn-out connecting mats, also eliminating tripping hazards

Highest Quality

- Raw virgin material only
 - Unbeaten durability and ergonomic relief
- Silicone & latex-free
- Not only anti-fatigue, but also true ergonomic benefits
 - Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments stimulating the body to increase blood circulation and alertness that will reduce sick leave, workers' compensation and quality issues.

The Nitril ESD-Conductive Advantage

- Chemical exposure will not affect the state of the mat; no curling up, swelling or expanding
 - No loss of the ergonomic properties and no tripping hazard
- Static control
- Cleanroom ISO Class 5 (100)
- Point to point electrical resistance

3-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

ERGOMAT® Nitril ESD-Conductive

ERGOMAT



www.awp.be
info@awp.be



| Properties | Standard | ERGOMAT Nitril ESD-Conductive |
|---|------------------------------------|--|
| Material | | Nitrile |
| Color | | Black |
| Weight | | 3300 g +/- 50 g // 7.3 lbs +/- 1.75 oz |
| Length without beveled edges | | 91,4 cm +/- 1% // 36" +/- 1% |
| Width without beveled edges | | 60 cm +/- 1% // 23.6" +/- 1% |
| Thickness | | 11 mm // 0.43" |
| Density | ISO 2781 | 1260 kg/m ³ |
| Hardness | ISO 868 | 50-60 Sh A |
| Friction | AVK Standard | 173 N |
| Abrasion Load = 5 N | ISO 46 49 (5 N) | 63 mm ³ // 2.5 in ³ |
| Elongation at break | ISO 37 | 400% |
| Tearing strength | ISO 37 Method C | 26 N/mm |
| Insulation Resistance | | |
| Electrical Resistance Surface point to point % 50 RH | DS EN 61340-5-1 | 5 x 10 ⁴ – 1,5 x 10 ⁵ |
| Thermal Conductance | Table Value | 3,3 W/m/°C |
| Thermal properties Minimum use Maximum use Maximum short duration | The ergonomic properties remain | -40°C // -40°F 90°C // 194°F 600°C // 1112°F |
| Flame Point | Table Value | 400°C // 752°F |
| UV-resistance | | Inferior |
| Cleanroom application | EN ISO 14644-1 | ISO Class 5 (100) |
| Warranty | | 3 years |